

526926

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



08 MAR 2005



(43) International Publication Date
25 March 2004 (25.03.2004)


PCT

(10) International Publication Number
WO 2004/025169 A1

- (51) International Patent Classification⁷: **F21S 8/00**,
F21V 3/04
- (21) International Application Number:
PCT/IB2003/003852
- (22) International Filing Date:
1 September 2003 (01.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02078758.6 12 September 2002 (12.09.2002) EP
- (71) Applicant (for all designated States except US): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **MARRA, Johannes**
[NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL).
- (74) Agent: **PET, Robert, J.**; Philips Intellectual Property &
Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: LIGHTING DEVICE

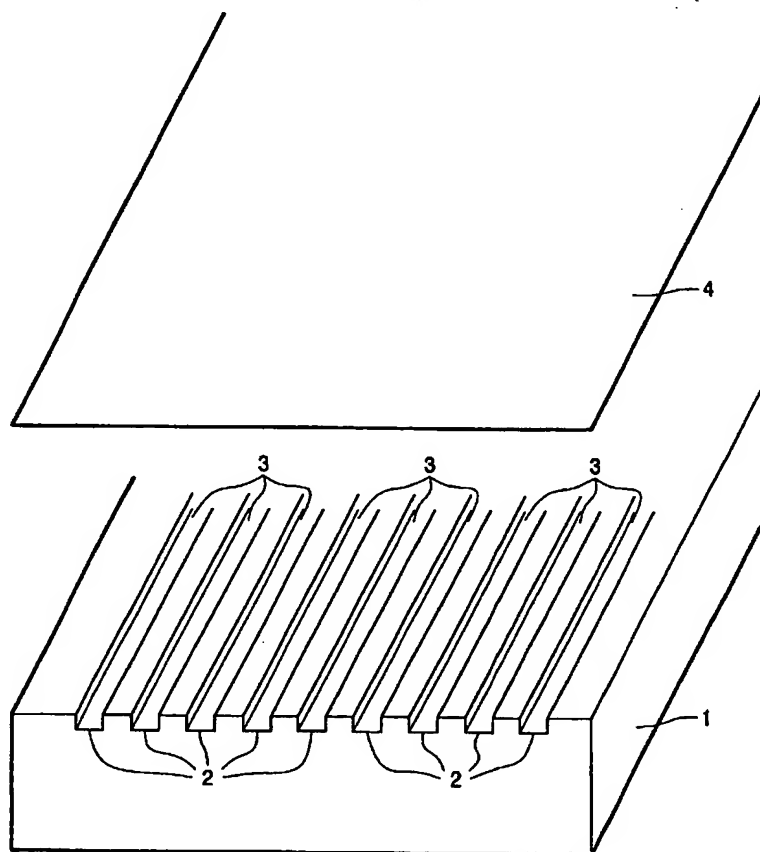

(57) Abstract: A lighting device comprising at least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate (1) is provided with means which reflect incident light on the plate (1), in such a manner that light which locally has a higher intensity is reflected more strongly at that location than light which locally has a lower intensity, a special feature being the fact that said means comprise at least one light-transmitting plate, which is locally provided with a patterned reflective material, the reflective material reflecting more than 80% of the incident light thereon.

WO 2004/025169 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Lighting device

The invention relates to a lighting device comprising at least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate is provided with means which reflect incident light on the plate, in such a manner that light which locally has a higher intensity is reflected more strongly at that location than light which locally has a lower intensity.

Such a lighting device is generally known. The known lighting device is usually a flat light box, such as the light box that is used for the visual inspection of x-ray photographs, for realising flat lighting tiles or lighting walls attached to walls or ceilings for general lighting purposes, or for backlighting advertising columns, billboards, or LCD screens. As a rule, the at least one light source that is present in the light box is at least partly surrounded by a reflector for reflecting the light emitted by the light source in a direction away from the light-transmitting plate back to the light-transmitting plate. An important practical requirement concerning such products is that the light exiting from the light-transmitting plate must exhibit a substantially homogeneous intensity over substantially the entire plate area, so that the location and the shape of the light source – for example in the form of one or more TL tubes in the case of a light box – cannot be distinguished as such from the outside. In order to accomplish this, it is known to apply a coating having a locally varying thickness, usually consisting of light-diffusing inorganic particles dispersed in an organic binder matrix, to the entire light-transmitting plate, for instance by spraying. The locally varying thickness causes the optical reflection of incident light on the plate to vary locally, wherein a coating which is locally relatively thicker effects a higher degree of reflection at the location in question than a coating which is locally relatively thinner. Consequently, the local variation in thickness in the coating must be selected so that the coating reflects incident light on the plate in such a manner that light which locally has a higher intensity is reflected more strongly by the coating at the location in question than light which locally has a lower intensity.

One drawback of the known lighting device is the fact that, in particular in the case of very flat light boxes, the required lateral thickness profile of the coating on the plate must exhibit a lateral thickness gradient which is so large and which, moreover, has been

adjusted so precisely in order to effect the desired reflection/transmission gradient over the entire light-transmitting plate, that, in practice, it is not possible to apply such a coating sufficiently reliably and efficiently.

The object of the invention is to overcome this drawback of the prior art, and

5 in order to accomplish that objective a lighting device of the kind according to the invention as referred to in the introduction is characterized in that said means comprise at least one light-transmitting plate, which is locally provided with a patterned reflective material, the provided reflective material reflecting more than 80% of the incident light thereon. Said material may be arranged in a one-dimensional pattern or in a two-dimensional pattern. In the

10 latter case, a two-dimensional pattern of lines and/or grooves provided with the reflective material is used, for example, wherein lines and/or grooves intersect so as to form a two-dimensional network, or wherein separate, possibly interconnected two-dimensional patterns, such as small squares or rectangles are provided with the reflective material. Preferably, practically no reflective material is present on the parts of the surface present between the

15 patterned reflective material on the plate. The reflective material is in particular a specular reflective material, preferably selected from the group of metals consisting of aluminium and silver. More in particular, the reflective material is a diffuse reflective powder, whilst it may also consist of diffuse reflective particles in a so-called "binder matrix", whether or not in combination with each other and/or in combination with a specular reflective material.

20 Experiments have shown that a patterned reflective material can readily be provided on the plate, the provided reflective material having a reflectivity of more than 80%, i.e. yielding a transmission of less than 20%, with a relatively higher pattern density at those locations where the intensity of the incident light is higher and a relatively lower pattern density at those locations where the intensity of the incident light is lower, and wherein the individual

25 patterns have been rendered visually indistinguishable by disposing an additional translucent plate, for example a matted plate, on the side of the light-transmitting plate facing away from the light source, spaced from said light-transmitting plate by a short distance and oriented in parallel thereto. The visual effect that is achieved therewith is that the light emitted by the lighting device has a laterally homogeneous intensity.

30 In one preferred embodiment of a lighting device according to the invention, said means comprise at least one light-transmitting plate having grooves formed therein, which grooves are filled with a diffuse reflective powder. In particular, grooves present at locations where the incident light on the plate has a higher intensity are wider than grooves present at locations where the incident light on the plate has a lower intensity, whilst in

another preferred variant the spacing between neighbouring grooves is smaller at locations where the incident light on the plate has a higher intensity than at locations where the incident light on the plate has a lower intensity. Thus, an average homogeneous intensity of light exiting from the light-transmitting plate is realised, in which the individual patterns have been rendered visually indistinguishable by disposing an additional translucent plate, for example a matted plate, on the side of the light-transmitting plate facing away from the light source, spaced from said light-transmitting plate by a short distance and oriented in parallel thereto.

In another preferred embodiment of a lighting device according to the invention, the grooves are formed in the light-transmitting plate of the housing, wherein the grooves are covered by a cover plate arranged on said plate.

In one preferred embodiment of a lighting device according to the invention, the grooves are formed in a light-transmitting second plate arranged on the light-transmitting plate of the housing, wherein the grooves in the second plate are covered by a cover plate arranged on said second plate. In another preferred variant, the grooves are formed in a light-transmitting second plate arranged on the light-transmitting plate of the housing, wherein the grooves are covered by the plate of the housing.

In another preferred embodiment of a lighting device according to the invention, the grooves have a minimum depth of at least 1.5 mm and a minimum width of at least 1 mm.

In another preferred embodiment of a lighting device according to the invention, the powder comprises calcium halophosphate, calcium pyrophosphate, BaSO_4 , MgO , YBO_3 , TiO_2 or Al_2O_3 particles. Such a powder is physically resistant against high temperatures, whilst important chemical properties thereof do not deteriorate as a result of being exposed to high temperatures, light and/or moisture. The powder is in particular a "free-flowing" type powder.

In another preferred embodiment of a lighting device according to the invention, the particles have an average diameter ranging from 0.1 to 100 μm , in particular from 5 to 20 μm . In order to obtain a "free-flowing" type powder, said particles are preferably mixed with fine-grained Al_2O_3 particles having an average diameter which ranges from 10 to 50 nm. The amount of the latter fine-grained particles, also known as Alon-C (Degussa, Frankfurt), preferably ranges from 0.1 to 5 wt. %, in particular from 0.5 to 3 wt. %.

In another preferred embodiment of a lighting device according to the invention, the powder is substantially incapable of absorbing light, in particular light having a

wavelength in the visible wavelength range. Any loss of light in this wavelength range due to absorption is thus prevented.

The invention also relates to a method for the lateral homogenisation of the intensity of the light emitted from a lighting housing, using a lighting device comprising at

5 least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate is locally provided with means which reflect incident light on the plate, in such a manner that light which locally has a higher intensity is reflected more strongly at that location than light which locally has a lower intensity, characterized in that said means comprise at least one light-transmitting plate, 10 which is locally provided with a material which reflects more than 80% of the incident light thereon, and wherein the patterned material has been rendered visually indistinguishable by disposing an additional translucent plate, for example a matted plate, on the side of the light-transmitting plate facing away from the light source, spaced from said light-transmitting plate by a short distance and oriented in parallel thereto.

15 The invention will not be explained in more detail with reference to figures illustrated in the drawings, in which:

Figure 1 is a schematic, perspective view of a part of a light box according to 20 the invention; and

Figures 2 and 3 are schematic top plan views of the light box of Figure 1, in which the diffuse reflective material is present in various patterns, however.

25 Figure 1 shows a light-transmitting glass or plastic plate 1, which is mounted on a light box (not shown). In order to ensure that TL-tubes (not shown) in the light box cannot be individually distinguished from the outside, incident light on the plate 1 coming from the TL-tubes must be made to exit the plate 1 with a homogeneous intensity over the entire area of the plate. To this end, longitudinal grooves 2 are formed in the plate 1 in 30 parallel with the orientation direction of the TL-tubes in the light box, and these grooves are provided with a diffuse reflective powder 3. Said powder 3 is a "free-flowing" type powder, comprising calcium halophosphate, calcium pyrophosphate, BaSO₄, MgO, YBO₃, TiO₂ or Al₂O₃ particles. The effect of said particles is that incident light on the light-transmitting plate 1 is diffuse reflected. By making the grooves 2 locally wider than elsewhere, and/or by

using a locally smaller spacing between adjacent grooves 2, light which locally has a higher intensity will be reflected more strongly at that location than light which locally has a lower intensity. In order to ensure that the powder 3 cannot move out of the grooves 2, a glass cover plate 4 is arranged on the plate 1.

5 Figures 2 and 3 show various patterns, viz. a one-dimensional pattern (Figure 2) and a two-dimensional pattern (Figure 3), in which the grooves 2 are formed in the plate 1. TL tubes are placed and positioned in the light box such as to directly face the areas "a" (Figure 2) and the areas "b" (Figure 3) of the light-transmitting plate 1. The individual patterns are rendered visually indistinguishable by disposing an additional translucent plate,
10 for example a matted plate, on the side of the light-transmitting plate facing away from the light source, spaced from said light-transmitting plate by a short distance and oriented in parallel thereto.

CLAIMS:

1. A lighting device comprising at least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate is provided with means which reflect incident light on the plate, in such a manner that light which locally has a higher intensity is reflected more strongly at that location than light
5 which locally has a lower intensity, characterized in that said means comprise at least one light-transmitting plate, which is locally provided with a patterned reflective material, the provided reflective material reflecting more than 80% of the incident light thereon.
2. A lighting device according to claim 1, wherein said material is arranged in a
10 one-dimensional spatial pattern on or in the light-transmitting plate.
3. A lighting device according to claim 1, wherein said material is arranged in a two-dimensional spatial pattern on or in the light-transmitting plate.
- 15 4. A lighting device according to claim 1, 2 or 3, wherein said means comprise at least one light-transmitting plate having grooves formed therein, which grooves are filled with a diffuse reflective powder.
5. A lighting device according to claim 4, wherein grooves present at locations
20 where the incident light on the plate has a higher intensity are wider than grooves present at locations where the incident light on the plate has a lower intensity.
6. A lighting device according to claims 4 and 5, wherein the spacing between neighbouring grooves is smaller at locations where the incident light on the plate has a higher
25 intensity than at locations where the incident light on the plate has a lower intensity.
7. A lighting device according to claim 4, 5 or 6, wherein the grooves are formed in the light-transmitting plate of the housing, and wherein the grooves are covered by a cover plate arranged on said plate.

8. A lighting device according to any one of the preceding claims 4 - 7, wherein the grooves are formed in a light-transmitting second plate arranged on the light-transmitting plate of the housing, and wherein the grooves in the second plate are covered by a cover plate
5 arranged on said second plate.

9. A lighting device according to any one of the preceding claims 4 - 8, wherein the grooves are formed in a light-transmitting second plate arranged on the light-transmitting plate of the housing, and wherein the grooves are covered by the plate of the housing.

10

10. A lighting device according to any one of the preceding claims 4 - 9, wherein said grooves have a minimum depth of at least 1.5 mm and a minimum width of at least 1 mm.

11. A lighting device according to any one of the claims 4 - 10, wherein said powder comprises calcium halophosphate, calcium pyrophosphate, BaSO_4 , MgO , YBO_3 , TiO_2 or Al_2O_3 particles.

12. A lighting device according to claim 11, wherein said particles have an
20 average diameter ranging from 0.1 to 100 μm , in particular from 5 to 20 μm .

13. A lighting device according to claim 11 or 12, wherein said particles are mixed with fine-grained Al_2O_3 particles having an average diameter which ranges from 10 to 50 nm.

25

14. A lighting device according to claim 13, wherein the amount of fine-grained Al_2O_3 particles having an average diameter ranging from 10 to 50 nm ranges from 0.1 to 5 wt. %, in particular from 0.5 to 3 wt. %.

15. A lighting device according to any one of the preceding claims 4 - 14, wherein said powder is a "free-flowing" type powder.

30

16. A lighting device according to any one of the preceding claims 4 - 15, wherein the powder is substantially incapable of absorbing light, in particular light having a wavelength in the visible wavelength range.

5 17. A method for the lateral homogenisation of the intensity of the light emitted from a lighting housing, using a lighting device comprising at least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate is locally provided with means which reflect incident light on the plate, in such a manner that light which locally has a higher intensity is reflected more strongly at that
10 location than light which locally has a lower intensity, characterized in that said means comprise at least one light-transmitting plate, which is locally provided with a reflective material which reflects more than 80% of the incident light thereon, and wherein the patterned material has been rendered visually indistinguishable by disposing an additional translucent plate, for example a matted plate, on the side of the light-transmitting plate facing
15 away from the light source, spaced from said light-transmitting plate by a short distance and oriented in parallel thereto.

1/2

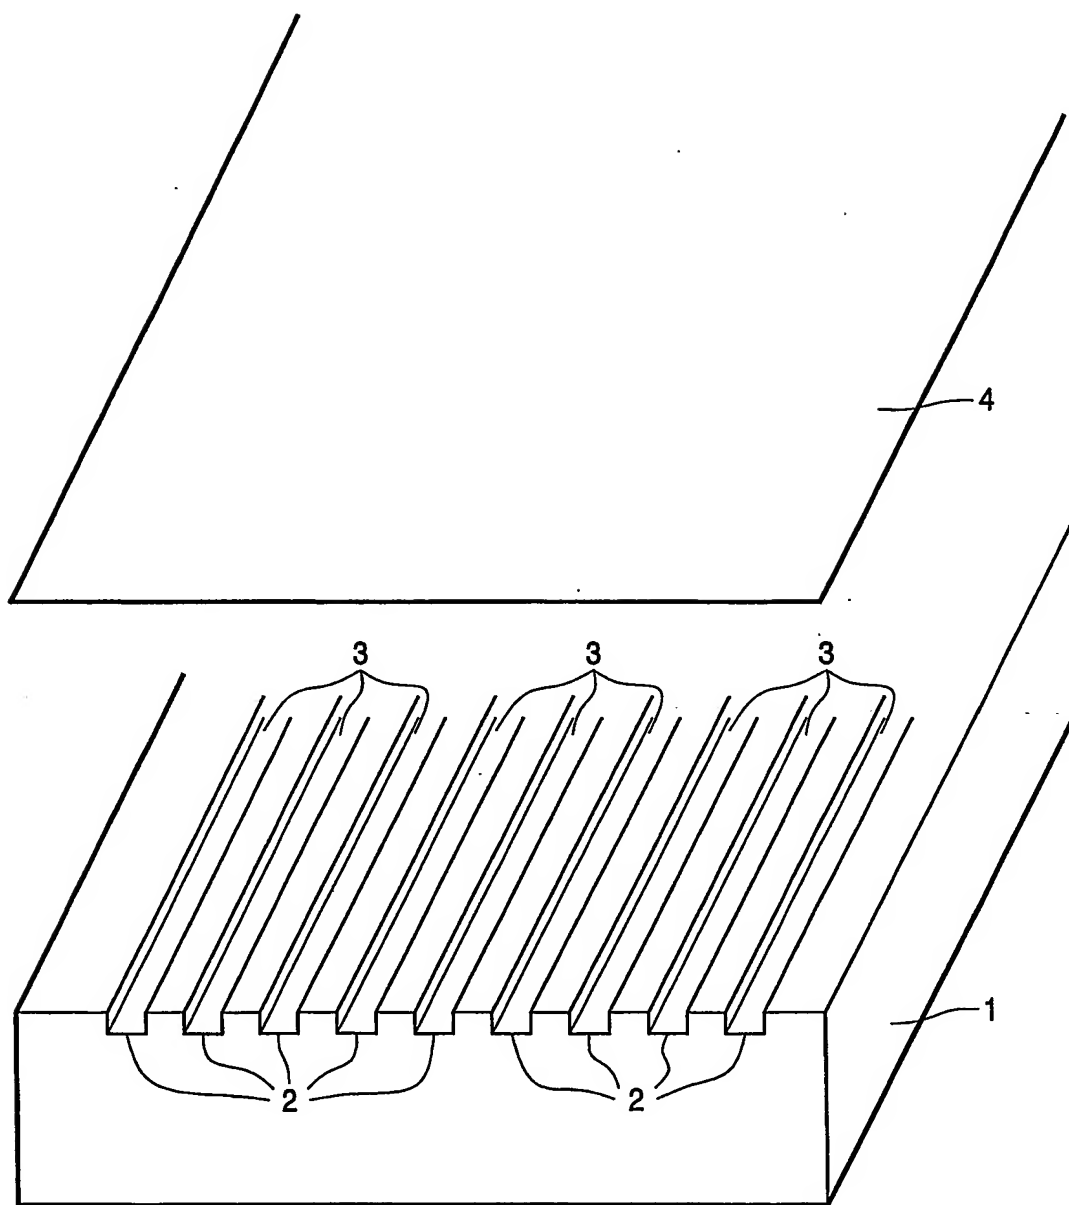


FIG.1

2/2

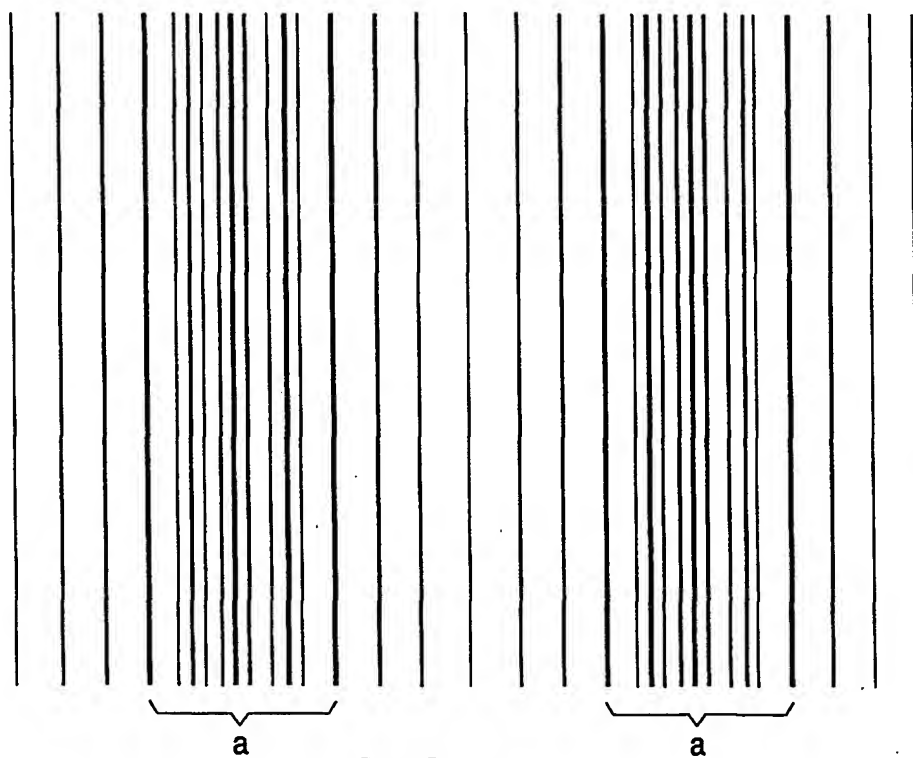


FIG. 2

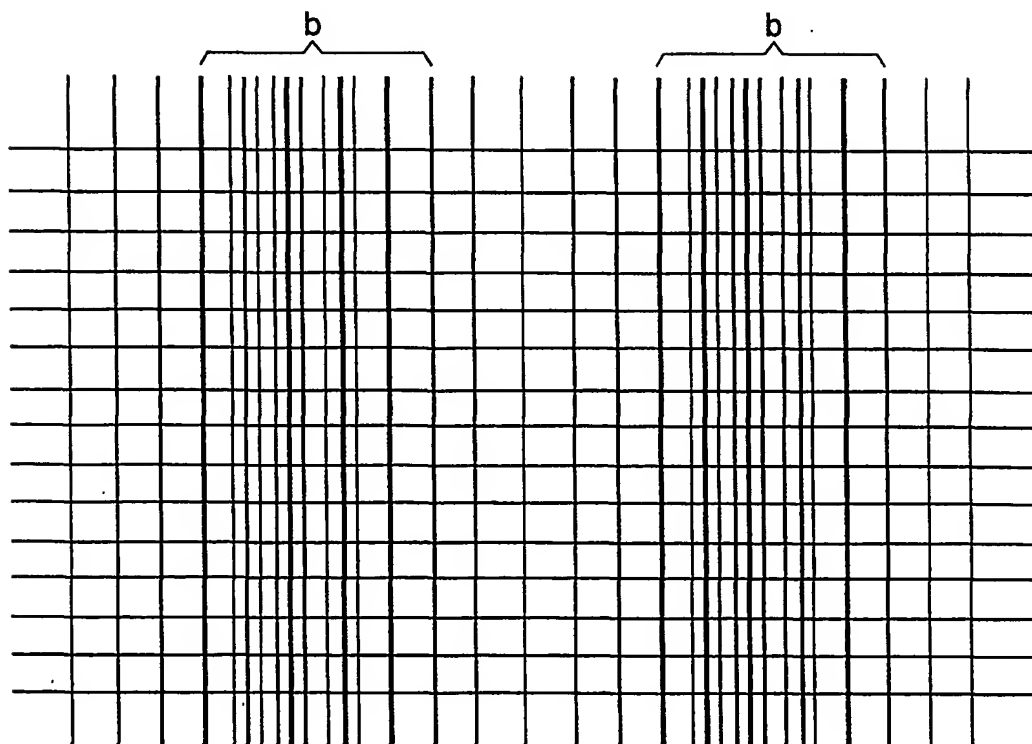


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/1/03852

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F21S8/00 F21V3/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21S F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 335 421 A (MODIA JOSEPH W ET AL) 15 June 1982 (1982-06-15) column 3, line 29 - line 68 column 4, line 13 - line 35 claims 12,14,16,20	1-3,17
X	GB 2 358 513 A (INDIGITALE LTD) 25 July 2001 (2001-07-25) page 6, line 5 - line 27 page 7, line 16 - page 8, line 18 claims 1,6-8,10,18,19 figures 1-5	1-3,17
A	---	5,6,9, 15,16
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

5 November 2003

Date of mailing of the international search report

12/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lange, C

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/JP87/03852

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 267 489 A (MOROHASHI HISAO) 12 May 1981 (1981-05-12) column 2, line 48 -column 3, line 27 column 5, line 42 - line 48 column 7, line 44 - line 62 figures 1,2A,2B,2C,3,9A ----	1-3,17
A	US 5 839 823 A (KUPER JERRY WAYNE ET AL) 24 November 1998 (1998-11-24) column 2, line 31 - line 42 column 4, line 42 - line 62 column 5, line 58 - line 67 figures 2,13,16,17,19-21,33-35 ----	1,4,11, 15,16
A	US 2 387 745 A (COLBERT WILLIAM H ET AL) 30 October 1945 (1945-10-30) page 2, column 1, line 25 -column 2, line 30 figures 1-5,7-11,13,15-17,19 -----	1-3,17

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/JP88/03852

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4335421	A	15-06-1982	NONE
GB 2358513	A	25-07-2001	NONE
US 4267489	A	12-05-1981	JP 55133008 A 16-10-1980 JP 55082619 U 07-06-1980
US 5839823	A	24-11-1998	AT 209768 T 15-12-2001 CA 2250312 A1 02-10-1997 CN 1220002 A ,B 16-06-1999 DE 69708615 D1 10-01-2002 DE 69708615 T2 01-08-2002 DK 890060 T3 18-02-2002 EP 0890060 A1 13-01-1999 ES 2169374 T3 01-07-2002 JP 2000507736 T 20-06-2000 KR 2000005023 A 25-01-2000 PT 890060 T 29-04-2002 TW 419572 B 21-01-2001 WO 9736131 A1 02-10-1997
US 2387745	A	30-10-1945	NONE